

JS-WP270HDRX

- **HDBT™**
- **HDCP**
- **4K**
- **1080P/60Hz**
- **PoC**




Overview


JS-WP270HDRX Wall-mounting Plate can be used as a receiver for the HDBaseT output from JS Long distance transmit interconnect box, it provides economical means of extending 1080p/ 60Hz video signals up to 70 meters. It not only transmits HD signals but also supports both HDCP and CEC. For digital signals which carry high definition images, this extender perfectly prolongs the transmission distance in a low-cost networking solution.

Product Features


- HDMI 1.4, HDCP 2.0 compliant;
- Supports maximum 1080P/UXGA HD input, and output has the same resolution as the input;
- Supports 3D 4K 2K;
- Device running indicator light;
- Link indicator light;
- HDCP protocol safe indicator light;
- HDBaseT compliant;
- With RS232 control capability;
- Supports PoC function.



Bottom Box Dimension (mm)



Wall Cutout Dimension (Please match with bottom box) (mm)

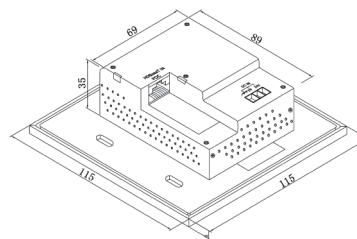

Overall Dimension (mm)




Table Cutout Dimension (mm)

Main Specification

Receiver input port:	1 X Cat6 RJ45 8pin
Receiver output port:	1 X HDMI socket
Resolution	720P50/60、1080i 50/60HZ、1080p 50/60HZ
HDTV	640x480=VGA72、VGA75、VGA85
PC	800x600=SVGA56、SVGA60、SVGA72、SVGA75、SVGA85
	1024x768=XGA60、XVG70、XGA75、XGA85
	1280x1024= SXGA60、SXGA75、SXGA85
	1600x1200=UXGA60
	1920x1200=shorten edge blanking WUXGA

Dimensions:	Panel: 115mm*115mm
	Box: 97mm*97mm*64mm
	Wall Cutout Dimension: 100mm*100mm*67mm
	Table Cutout Dimension: 92mm*72mm